



## TWIN VOLT INNOVATIONS

Supply all over INDIA

08056062963 / 09500640313

www.twinvolt.in

A Manufacturer of Automatic Water Level Controllers, Starters and Indicators

### FULLY AUTOMATIC WATER LEVEL CONTROLLER WITH DRY RUN PROTECTION - SUMP PUMP CONTROLLER/STARTER

#### Features:

**Model Name:** 2T - Automatic Water Level Controller

**Controls:** SUMP Pumps - OHT & SUMP control

**Features:** Automatic ON & OFF with Dual DRY RUN protection

**Indications:** Power ON, Auto, Flow/Dry run, Low & High Level - OHT & SUMP

**Method:** Direct upto 2HP, Indirect upto 90HP

**Material:** SS304 Sensors & ABS Enclosure Cabin

**Sensor Type:** FG/Contact type sensors - Shock & Rust proof

**Sensor Volts:** 6 Volts with High Frequency

**Distance:** Works upto 2000 Mtrs

**Voltage Regulation:** 160V - 270V

**Applications:** Compressor, Openwell submersible pump, JET, Mono block

**Technology:** Micro controller based automatic water level controller

**Add.Feature:** Can be act as **STARTER** with automatic level controller for Open well submersible pumps



MODEL: OW S-2T

#### Certified & Approved by:



GOVERNMENT OF TAMILNADU  
PUBLIC WORKS DEPARTMENT



#### Suitable for:



Mono Block




JET Pump



Compressor pump



Open well submersible pump

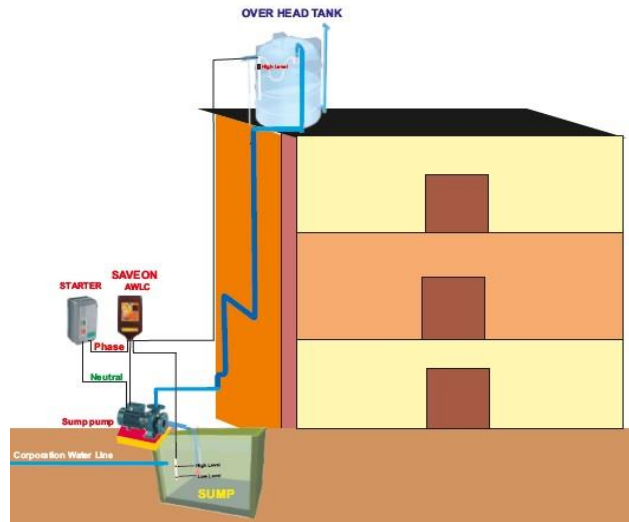

#### Working:

1. Auto "ON", when tank water level goes below LOW level sensor (Fixed at 50%) & sump water level must be above foot valve
2. Auto "OFF", when tank water level reached HIGH level sensor (Fixed at 90%) Or sump water level goes below foot valve
3. DRY RUN sensor always monitor the flow of water at the pump delivery, in case of DRY RUN condition, the motor will be switched "OFF" in 30 seconds while running and 3 minutes during starting. Auto/Manual push button available
4. Monitors and controls Over head tank & sump. Dedicated breaker is provided for short circuit & lightning fault protection
5. Customizing is possible depending on customers requirements.